


RoHS Compliant

2000±30mm

REV LTR	DATE	REV. DIMENSION	DESIGN	APPROVE
△	2019.12.12	NEW DRAWING	Jimmy	

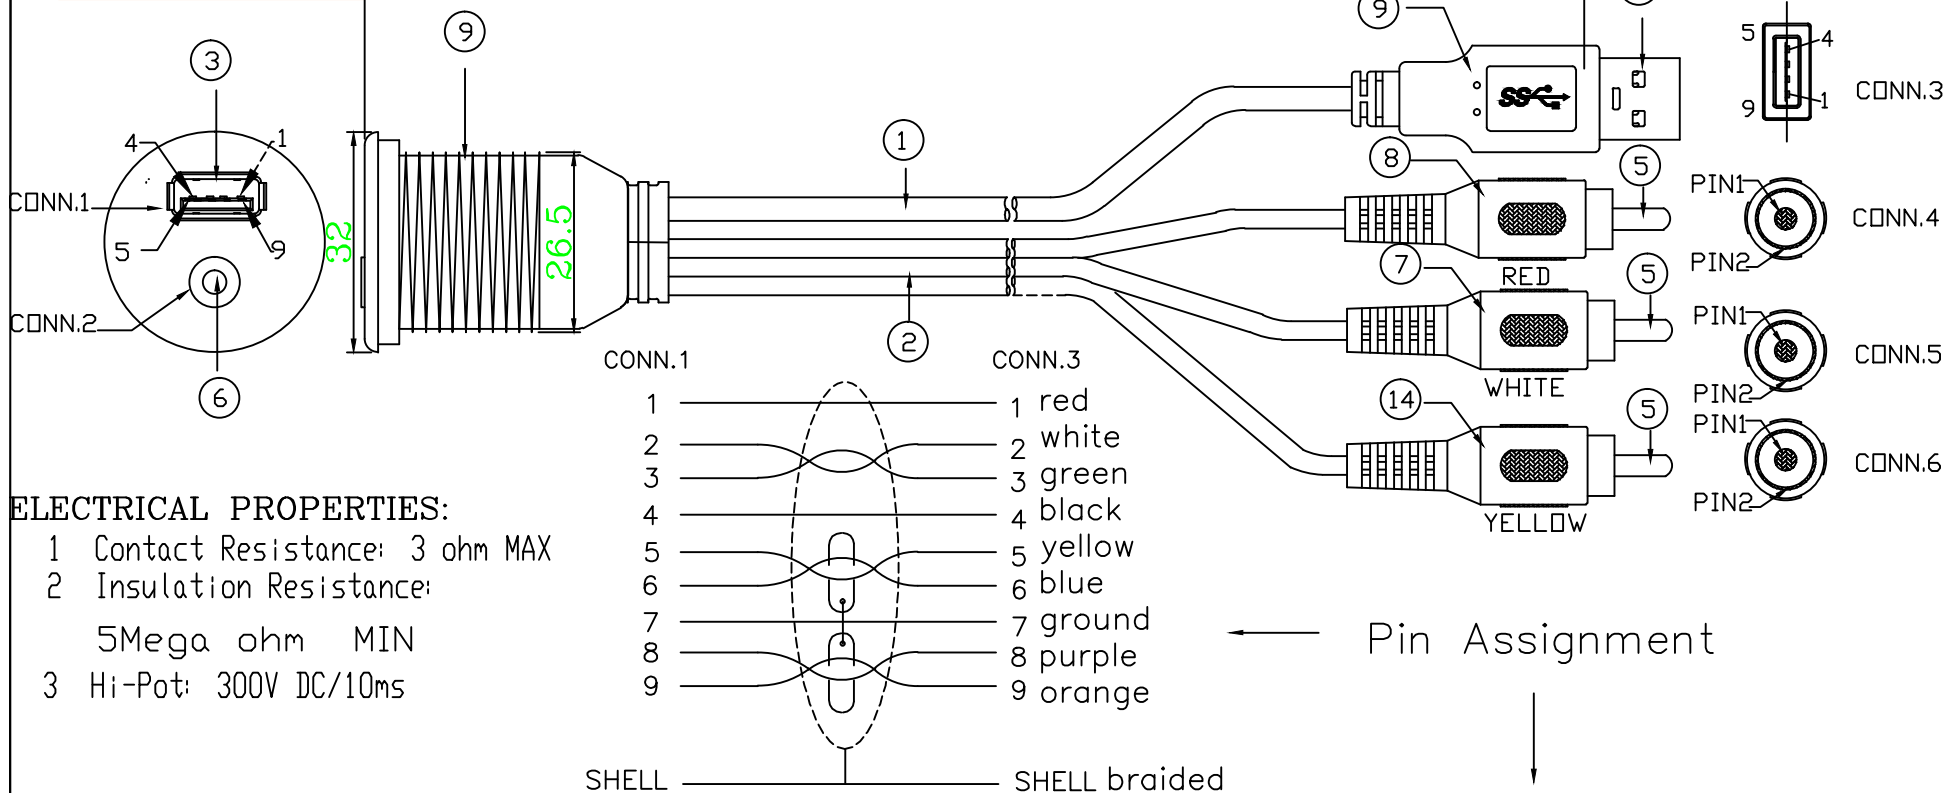


ELECTRICAL PROPERTIES:

- 1 Contact Resistance: 3 ohm MAX
- 2 Insulation Resistance: 5Mega ohm MIN
- 3 Hi-Pot: 300V DC/10ms

- 1 red
- 2 white
- 3 green
- 4 black
- 5 yellow
- 6 blue
- 7 ground
- 8 purple
- 9 orange

SHELL SHELL braided

← Pin Assignment

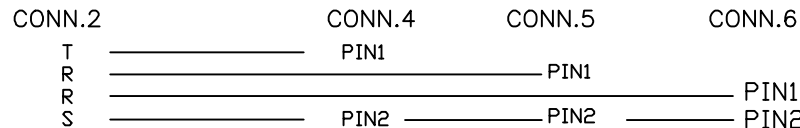

⑨	PVC 45P COLOR:BLACK	9
⑧	PVC 45P COLOR:RED	9
⑦	PVC 45P COLOR:WHITE	9
⑥	TRRS FEMALE (GOLD FLASH)	1
⑤	RCA MALE (GOLD FLASH) 管式	3
④	USB 3.0 A TYPE MALE,CONTACT: GOLD FLASH.	1
③	USB 3.0 A FEMALE+METAL CAN ,CONTACT:GLOD FLASH.	1
②	CABLE: [1C(28AWG)+SPARIL(32/0.10)+PVC JACKET]x3 OD:2.8+2.8+2.8mm	1
①	CABLE:(7/0.12TS*1P+7/0.10BS地+AL+透明麦拉)*2C+7/0.12TS*1P+7/0.20TS*2C+AL+7/0.16B铜地+96/0.12AM OD5.5 COLOR: BLACK	1
NO.	DESCRIPTION	Q'TY

		DESCRIPTION	USB 3.0 AF+TRRS F TO USB 3.0 AM+3RCA 2M		
		PART No.			
DRAW	Jimmy	DWG. No.	REV.	A	
CHECK		DATE	2019.12.12	SCALE	NONE
APP.		SIZE	A4	UNIT	mm
		SHEET	3/3		